

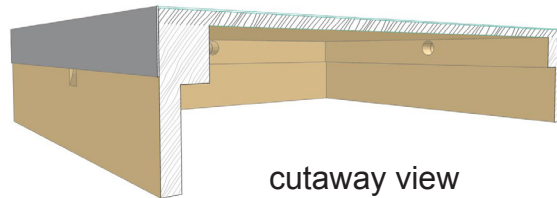


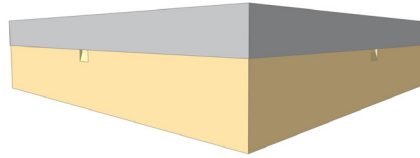

www.peak-hives.co.uk

Standard National Roof Assembly Instructions

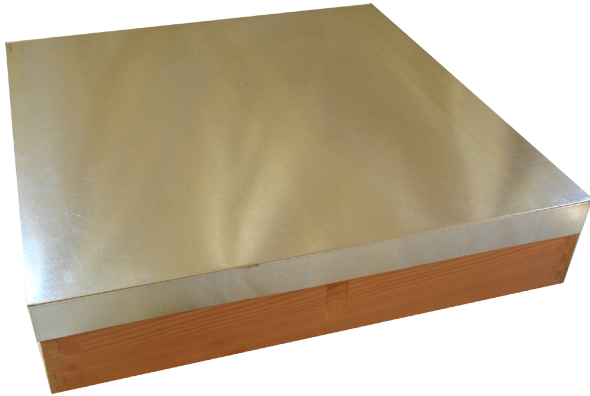

You will need:

A carpenters/joiners square.

A hammer (and punch if handy)

Exterior Wood Glue (we use polyurethane glue)

A flat surface on which to work



1. First do a dry assembly understanding where each part fits, which nails to use where, and solving any issues before gluing. If unsure then please call Nick on 07594 583151.
2. Apply glue to the lock joints on the roof sides and spread on all contact surfaces.
3. Assemble roof sides as glued.
4. Apply glue to the top of the roof sides and pin roof ply to the top of the sides. The roof top should serve as a square to ensure correct assembly but also check with a square.
5. Turn over and glue and nail the roof inner pieces into position ensuring that the ventilation holes coincide.
6. Leave for 24 hours on a flat surface for glue to set.
7. Place the galvanised cover on the roof and nail into place in the four corners. Then pin the cover into position ensuring a tight fit.
8. Tack into place the mesh squares that prevent wasps and robbing bees from entering.